




Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle Cantilever Shelving System to consist of 14 gauge regular or NSF continuously seam-welded uprights, ceiling brackets, and single- or double-knob brackets. For use with either wire or solid shelving (sold separately). Ceiling brackets and knob brackets available in grey epoxy, stainless steel, or aluminum finish. Foot brackets, used for island applications, available in grey epoxy or stainless steel finish.



wall-mounted cantilevered shelving shown with wire shelving

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Cantilevered Shelving System — Brackets

MODELS:

- | | | |
|---------------------------------------|---------------------------------------|---------------------------------------|
| <input type="checkbox"/> MMCB-6-* | <input type="checkbox"/> MMNSBSS-K-* | <input type="checkbox"/> MMFB-K-* |
| <input type="checkbox"/> MMNSCB-6-* | <input type="checkbox"/> MMB-K/A-* | <input type="checkbox"/> MMNSFB-K-* |
| <input type="checkbox"/> MMCBSS-6-* | <input type="checkbox"/> MMNSB-K/A-* | <input type="checkbox"/> MMFBSSK-* |
| <input type="checkbox"/> MMNSCBSS-6-* | <input type="checkbox"/> MMDB-K-* | <input type="checkbox"/> MMNSFBSSK-* |
| <input type="checkbox"/> MMCB/A6-* | <input type="checkbox"/> MMNSDB-K-* | <input type="checkbox"/> MMDFB-K-* |
| <input type="checkbox"/> MMNSCB/A6-* | <input type="checkbox"/> MMDBSS-K-* | <input type="checkbox"/> MMNSDFB-K-* |
| <input type="checkbox"/> MMB-K-* | <input type="checkbox"/> MMNSDBSS-K-* | <input type="checkbox"/> MMDFBSSK-* |
| <input type="checkbox"/> MMNSB-K-* | <input type="checkbox"/> MMDB-K/A-* | <input type="checkbox"/> MMNSDFBSSK-* |
| <input type="checkbox"/> MMBSS-K-* | <input type="checkbox"/> MMNSDB-K/A-* | |

* See charts for complete model numbers.

- Designed with convenience in mind.
- Requires no post supports to get in the way, making shelf loading and unloading easier.
- For use with both wire and solid shelving.
- 100% usable shelving surface, from section to section, wall to wall, and front to back — no posts to restrict stock placement.
- Infinite height adjustability — no slots or keyholes to line up for leveling, and shimming is eliminated.
- Wall-mounted shelving requires no support from the floor — floor area is therefore open and easily maintained.
- Finishes available include grey epoxy, stainless steel, and aluminum.
- Regular and NSF-approved components available.
- All components are made of heavy gauge material.
- Heavy-duty, rugged construction.

See Spec Sheet #EG01.45A for Uprights.
 See Spec Sheet #EG01.45C for Heavy Duty Components.

CEILING BRACKETS

Offered in grey epoxy, aluminum or stainless steel. Regular or NSF-approved.

description	GREY EPOXY		STAINLESS STEEL		ALUMINUM	
	REGULAR model #	NSF model #	REGULAR model #	NSF model #	REGULAR model #	NSF model #
left	MMCB-6-L	MMNSCB-6-L	MMCBSS-6-L	MMNSCBSS-6-L	MMCB/A6-L	MMNSCB/A6-L
right	MMCB-6-R	MMNSCB-6-R	MMCBSS-6-R	MMNSCBSS-6-R	MMCB/A6-R	MMNSCB/A6-R

EAGLE GROUP
 100 Industrial Boulevard, Clayton, DE 19938-8903 USA
 Phone: 302-653-3000 • Fax: 302-653-2065
 www.eaglegrp.com

Foodservice Division: Phone 800-441-8440
MHC/Retail Display Divisions: Phone 800-637-5100

For custom configuration or fabrication needs, contact our **SpecFAB® Division**.
 Phone: 302-653-3000 • Fax: 302-653-3091 • e-mail: specfab@eaglegrp.com



EG01.45B Rev. 09/10

Spec sheets available for viewing, printing or downloading from our online literature library at www.eaglegrp.com



Profit from the Eagle Advantage®

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

KNOB BRACKETS

Single Knob Brackets

For use with wire or solid shelving. Available with flanges at top left or right. To order, add suffix “-L” (left bracket) or “-R” (right bracket) to model number. Example: MMB-K-21-L

length in. mm	GREY EPOXY			STAINLESS STEEL			ALUMINUM		
	REGULAR model #	NSF model #	weight lb. kg	REGULAR model #	NSF model #	weight lb. kg	REGULAR model #	NSF model #	weight lb. kg
14" 356	MMB-K-14	MMNSB-K-14	2 0.9	MMBSS-K-14	MMNSBSS-K-14	2 0.9	MMB-K/A-14	MMNSB-K/A-14	1 0.5
18" 457	MMB-K-18	MMNSB-K-18	3 1.4	MMBSS-K-18	MMNSBSS-K-18	2 0.9	MMB-K/A-18	MMNSB-K/A-18	1 0.5
21" 533	MMB-K-21	MMNSB-K-21	4 1.8	MMBSS-K-21	MMNSBSS-K-21	4 1.8	MMB-K/A-21	MMNSB-K/A-21	1 0.5
24" 610	MMB-K-24	MMNSB-K-24	5 2.3	MMBSS-K-24	MMNSBSS-K-24	5 2.3	MMB-K/A-24	MMNSB-K/A-24	2 0.9

Double Knob Brackets

For use with wire or solid shelving. With flanges on top left and right, these brackets support two adjoining shelves on a common upright.

length in. mm	GREY EPOXY			STAINLESS STEEL			ALUMINUM		
	REGULAR model #	NSF model #	weight lb. kg	REGULAR model #	NSF model #	weight lb. kg	REGULAR model #	NSF model #	weight lb. kg
14" 356	MMDB-K-14	MMNSDB-K-14	3 1.4	MMDBSS-K-14	MMNSDBSS-K-14	2 0.9	MMDB-K/A-14	MMNSDB-K/A-14	1 0.5
18" 457	MMDB-K-18	MMNSDB-K-18	4 1.8	MMDBSS-K-18	MMNSDBSS-K-18	4 1.8	MMDB-K/A-18	MMNSDB-K/A-18	2 0.9
21" 533	MMDB-K-21	MMNSDB-K-21	5 2.3	MMDBSS-K-21	MMNSDBSS-K-21	5 2.3	MMDB-K/A-21	MMNSDB-K/A-21	2 0.9
24" 610	MMDB-K-24	MMNSDB-K-24	6 2.7	MMDBSS-K-24	MMNSDBSS-K-24	6 2.7	MMDB-K/A-24	MMNSDB-K/A-24	2 0.9

FOOT BRACKETS WITH KNOBS

Used for island application.


Single Foot Brackets with Knobs

For use with wire or solid shelving. Serves as a base for bottom shelf. Available with left or right top flanges. To order, add suffix “-L” (left bracket) or “-R” (right bracket) to model number. Example: MMFB-K-14-R

length in. mm	GREY EPOXY			STAINLESS STEEL		
	REGULAR model #	NSF model #	weight lb. kg	REGULAR model #	NSF model #	weight lb. kg
14" 356	MMFB-K-14	MMNSFB-K-14	4 1.8	MMFBSSK-149	MMNSFBSSK-149	4 1.8
18" 457	MMFB-K-18	MMNSFB-K-18	5 2.3	MMFBSSK-189	MMNSFBSSK-189	6 2.7
21" 533	MMFB-K-21	MMNSFB-K-21	6 2.7	n/a	n/a	-
24" 610	MMFB-K-24	MMNSFB-K-24	7 3.2	MMFBSSK-249	MMNSFBSSK-249	7 3.2



single
foot bracket

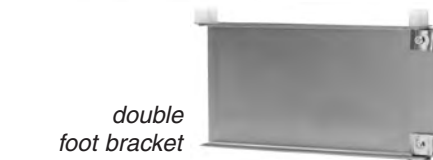

double
foot bracket

Double Foot Brackets with Knobs

For use with wire or solid shelving. Serves as a base for two adjoining bottom shelves.

length in. mm	GREY EPOXY			STAINLESS STEEL		
	REGULAR model #	NSF model #	weight lb. kg	REGULAR model #	NSF model #	weight lb. kg
14" 356	MMDFB-K-14	MMNSDFB-K-14	4 1.8	MMDFBSSK-149	MMNSDFBSSK-149	5 2.3
18" 457	MMDFB-K-18	MMNSDFB-K-18	5 2.3	MMDFBSSK-189	MMNSDFBSSK-189	7 3.2
21" 533	MMDFB-K-21	MMNSDFB-K-21	6 2.7	n/a	n/a	-
24" 610	MMDFB-K-24	MMNSDFB-K-24	7 3.2	MMDFBSSK-249	MMNSDFBSSK-249	8 3.6

WEIGHT CAPACITY PER BRACKET

Pertains to all brackets listed on this page.

bracket length		maximum load recommended	
in.	mm	lb.	kg
14"	356	540	244.9
18"	457	465	210.9
21"	533	395	179.2
24"	610	360	163.3

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440

MHC/Retail Display Divisions: Phone 800-637-5100

Printed in U.S.A.
©2010 by Eagle Group

Rev. 09/10

Spec sheets available for viewing, printing or downloading from our online literature library at www.eaglegrp.com

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.